


BRONZE UNDERGROUND TRANSFORMER TERMINALS • TYPE UTS



Can be supplied with studs bonded to terminal. Add suffix "S" to catalog number.

Example: UTS-0513-2-S.


Type UTS is cast of high copper content alloy and electroplated. For use with aluminum or copper compression or bolted type lugs.

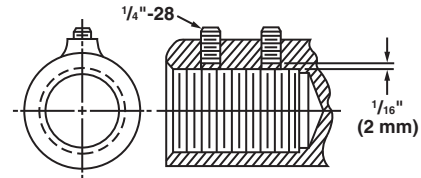

Stud locking set screws may be ordered by adding suffix "SS" to catalog numbers (1 stud locking set screw provided on all sizes except where "A" dimension is 1-14, which has 2 stud locking set screws.)

Example without studs: UTS-0513-4L-SS.

Example with studs: UTS-0513-4L-S-SS.

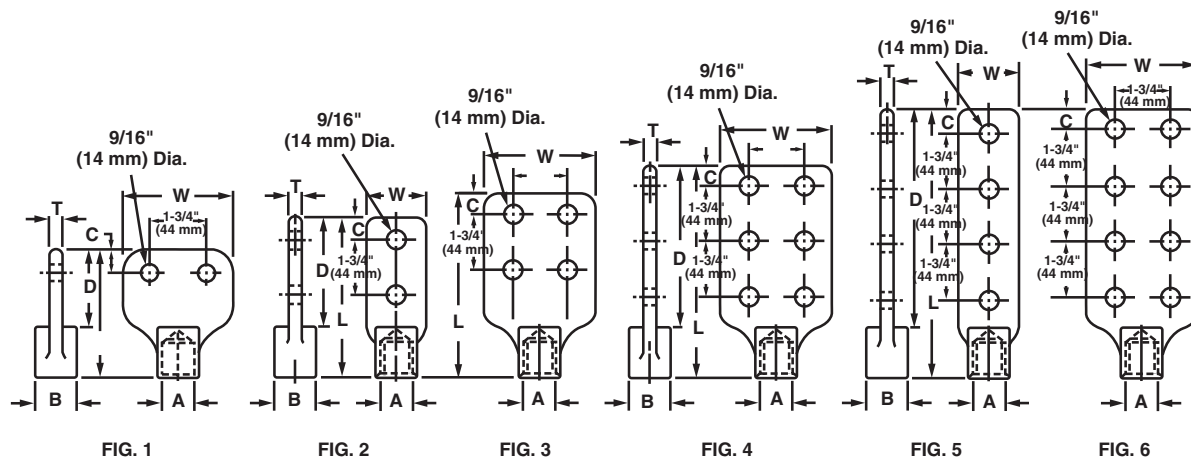

Catalog Number	Fig. No.	Approximate Dimensions													
		A		B		C		D		L		T		W	
		in	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
UTS-0316-2	1	3/8-16	7/8	22	5/8	16	2 ³ /8	60	4	102	1/4	6.35	3 ¹ /2	89	
UTS-0316-2L	2				3/4	19	3 ¹ /2	89	5 ¹ /16	129	5/16	7.94	1 ³ /8	35	
UTS-0316-4	3				5/8	16	4 ¹ /8	105	5 ³ /4	146	1/4	6.35	3 ¹ /2	89	
UTS-0316-4L	5				3/4	19	6 ¹³ /16	173	8 ³ /8	213	5/16	7.94	1 ³ /8	35	
UTS-0513-2	1	1/2-13	7/8	22	5/8	16	2 ³ /8	60	4	102	1/4	6.35	3 ¹ /2	89	
UTS-0513-2L	2				3/4	19	3 ¹ /2	89	5 ¹ /16	129	5/16	7.94	1 ³ /8	35	
UTS-0513-4	3				5/8	16	4 ¹ /8	105	5 ³ /4	146	1/4	6.35	3 ¹ /2	89	
UTS-0513-4L	5				3/4	19	7	178	8 ³ /8	213	5/16	7.94	1 ³ /8	35	
UTS-0611-2	1	5/8-11	7/8	22	5/8	16	2 ³ /8	60	4	102	1/4	6.35	3 ¹ /2	89	
UTS-0611-2L	2				3/4	19	3 ¹ /2	89	5 ¹ /16	129	5/16	7.94	1 ³ /8	35	
UTS-0611-4	3				5/8	16	4 ¹ /8	105	5 ³ /4	146	1/4	6.35	3 ¹ /2	89	
UTS-0611-4L	5				3/4	19	7	178	8 ³ /8	213	5/16	7.94	1 ³ /8	35	
UTS-1014-2	1	1-14	1 ³ /8	35	5/8	16	2 ³ /8	60	4	102	3/8	9.53	3 ¹ /2	89	
UTS-1014-2L	2				3/4	19	3 ⁹ /16	90	5 ¹ /8	130	1 ¹¹ /32	8.73	1 ¹⁵ /16	49	
UTS-1014-4	3				5/8	16	4 ¹ /8	105	5 ³ /4	146	3/8	9.53	3 ¹ /2	89	
UTS-1014-4L	5		1 ⁷ /16	37	3/4	19	7 ¹ /16	179	9 ⁷ /16	240	1 ¹¹ /32	8.73	1 ¹⁵ /16	49	
UTS-1014-6	4		1 ³ /8	35	5/8	16	5 ¹ /8	130	6 ¹¹ /16	170	3/8	9.53	3 ¹ /2	89	
UTS-1014-8	6				5/8	16	6 ⁷ /8	175	9 ⁷ /16	240	3/8	9.53	3 ¹ /2	89	