


### SmartZone™ G5 Power Distribution Units (PDUs)

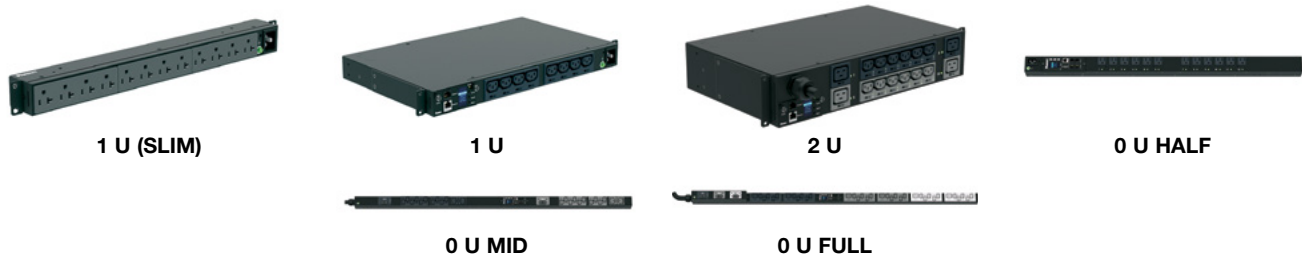

#### Dimensions

Form Factor	Height In. (mm)	Width In. (mm)	Depth In. (mm)
1 U (SLIM)	1.6 (40.6)	17.5 (444.5)	2.0 (50.8)
1 U	1.7 (43.2)		7.8 (198.1)
2 U	3.4 (86.4)		
0 U HALF	32.2 (817.9)	2.0 (50.8)	2.1 (53.3)
0 U MID	58.7 (1491.0)		
0 U FULL	68.9 (1750.1)		

### Monitored Input (MI Series)

- Provides aggregate PDU monitoring to quickly identify potential power issues and reclaim available or under-utilized power capacity
- Can also be used for environmental monitoring through sensors and electronic rack access control through electronic swing-handles (each sold separately)

Part Number	Input Current per Phase	Form Factor	Input Plug Type	Apparent Power kVA	Outlet Count	Outlet Type	Length In. (mm)	Width In. (mm)	Depth In. (mm) at Outlet Position
<b>100-240VAC, 1-Phase</b>									
<b>BEST SELLER</b> P08D09M	15	1 U	5-15P	1.4	8	(8)5-20R	1.7 (43.2)	17.5 (444.5)	10.6 (269.2)
<b>BEST SELLER</b> P16D22M	20	0 U HALF	L5-20P	1.9	16	(16)5-20R	32.2 (817.9)		
<b>BEST SELLER</b> P24D24M			L6-20P	3.3		(20)C13, (4)C19			
<b>BEST SELLER</b> P24D23M	30	0 U MID	L5-30P	2.9	24	(24)5-20R	58.7 (1491.0)	2.0 (50.8)	2.1 (53.34)
<b>BEST SELLER</b> P24D07M			L6-30P	5.0		(20)C13,(4)C19			
<b>BEST SELLER</b> P38D25M			0 U FULL			38			

#### 208VAC, 3-Phase

<b>BEST SELLER</b> P36D08M	30		L15-30P	8.6	36	(30)C13, (6)C19	68.9 (1750.1)	2.0 (50.8)	2.1 (53.3)
<b>BEST SELLER</b> P38D28M			L21-30P			38			
<b>BEST SELLER</b> P36D29M	50	0 U FULL	CS8365C	10.0	36	(30)C13, (6)C19	70.0 (1778.0)	2.2 (55.9)	3.1 (78.7)
<b>BEST SELLER</b> P36D31M	60		IEC 60309-460P9	17.3		(24)C13, (12)C19			3.0 (76.2)
<b>BEST SELLER</b> P42D20M						42			(21)C13/C15, (21)C13/C15/C19/C21