
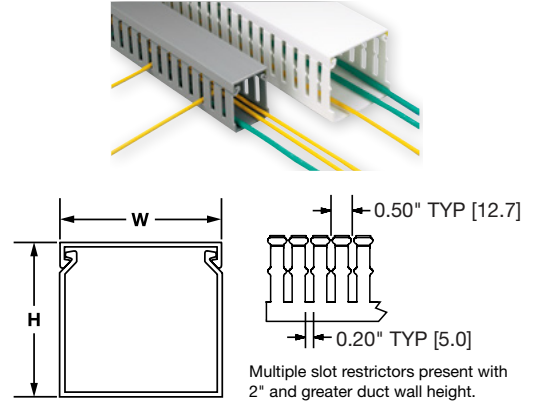


Panduit® Type F Narrow Slot Wiring Duct

- Narrow slot/finger design provides more slots to fit the spacing of high-density terminal blocks and other hardware
- Material: Lead-free PVC
- UL recognized continuous use temperature: 122°F (50°C)
- UL 94 flammability rating of V-0
- Conforms with NFPA 79-2015 section 13.3.1 requirement for flame retardant material
- Provided with mounting holes
- Base and cover length is 6 feet

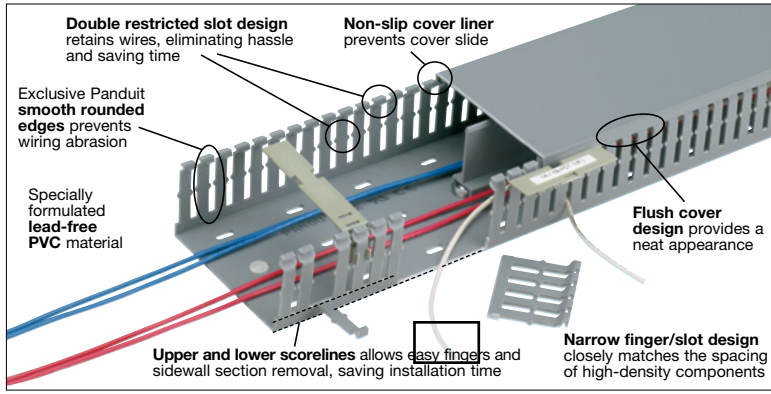

Part Number	Duct Size (W x H)*		Slot Width		Cover Part Number	Base Ctn. Qty.	Cover Ctn. Qty.
	In.	mm	In.	mm			
F.75X1.5LG 6	0.94 x 1.57	23.6 x 39.9	0.20	5.0	C.75LG6	120	120
F1X1LG6	1.25 x 1.13	32.0 x 28.7			C1LG6		
F1X1.5LG6	1.25 x 1.62	32.0 x 41.1			C1LG6		
F1X2LG6	1.25 x 2.12	32.0 x 53.8			C1LG6		
BEST SELLER F1X3LG6	1.25 x 3.13	32.0 x 79.4			C1LG6		
F1X4LG6	1.25 x 4.10	32.0 x 104.1			C1LG6		
F1.5X1.5LG6	1.75 x 1.62	44.5 x 41.1			C1.5LG6		
F1.5X2LG6	1.75 x 2.12	44.5 x 53.8			C1.5LG6		
BEST SELLER F1.5X3LG6	1.75 x 3.12	44.5 x 79.2			C1.5LG6		
F1.5X4LG6	1.75 x 4.10	44.5 x 104.1			C1.5LG6		
F2X2LG6	2.25 x 2.12	57.2 x 53.8			C2LG6		
BEST SELLER F2X3LG6	2.25 x 3.14	57.2 x 79.8			C2LG6		
BEST SELLER F2X4LG6	2.25 x 4.10	57.2 x 104.1			C2LG6		
F2X5LG6	2.25 x 5.10	57.2 x 129.5			C2LG6		
F2.5X3LG6	2.75 x 3.12	69.9 x 79.2			C2.5LG6		
F3X2LG6	3.25 x 2.12	82.6 x 53.8			C3LG6		
F3X3LG6	3.25 x 3.13	82.6 x 78.7			C3LG6		
BEST SELLER F3X4LG6	3.25 x 4.10	82.6 x 104.1			C3LG6		
F3X5LG6	3.25 x 5.10	82.6 x 129.5			C3LG6		
F4X3LG6	4.25 x 3.12	108.0 x 79.2			C4LG6		
BEST SELLER F4X4LG6	4.25 x 4.10	108.0 x 104.1	C4LG6				
F4X5LG6	4.25 x 5.10	108.0 x 129.5	C4LG6				
F6X4LG6	6.25 x 4.15	158.8 x 105.4	C6LG6				

Part number shown for LG (Light Gray). For other sizes and color availability visit www.panduit.com
 Base and cover sold separately
 *H" dimension includes duct and cover