



### Quality & Reliability

3-Year standard and 5-Year extended warranty.



### High Temperature

Built with premium components to withstand 140°F (60°C) at full load.



### High Density Power

Unique outlets design for high outlet density.



### Hot-Swappable & Upgradable

Hot-Swappable Controller with large OLED display.



### Hardened Security

Enhanced security with certificate-based advanced asymmetric encryption, validated and hardened with multiple security scanning tools.



### 1GB On Board Ethernet Connection

Reduces deployment time and labor as PDU auto negotiates to 1GB network switches.



### Real-Time Monitor

Real-time Monitoring of Power, Environmental & Cabinet Security.



### Plug & Play Accessories

Variety Environmental & Cabinet Access Control Accessories.



### Multi-Device WebGUI

Enhanced User-Experience with a self adjusting WebGUI that senses the device you are on.



### Multi-Color

A variety of colored PDU chassis, power cords, and cable ties.

### Monitored Input (MI Series)

Intelligent aggregated input and branch power monitoring to quickly identify power issues and reclaim available or underutilized power capacity at the power distribution unit level.

### Monitored Switched (MS Series)

Intelligent aggregated input and branch power monitoring with outlet level switching for individual outlets or outlets group, enabling graceful power up/down sequencing, rebooting equipment or restricting unauthorized use of individual outlets.

### Monitored Per Outlet (MPO Series)

Intelligent aggregated input, branch and individual outlet power monitoring to quickly identify potential power issues, reclaim available or underutilized power capacity at the outlet level enabling more granular power capacity optimization.

### Monitored & Switched Per Outlet (MSP0 Series)


Intelligent aggregated input, branch and individual outlet power monitoring with outlet level switching for individual outlets or outlets group, enabling graceful power up/down sequencing, rebooting equipment or restricting unauthorized use of individual outlets.

### Basic PDU's

Non-intelligent power distribution unit with compact design providing reliable power for low cost solutions.

### Accessories

Offering extensive variety of intelligent environmental sensors and security devices to be used with intelligent power distribution units. Also offering dual locking power cords to be used with all power distribution units.

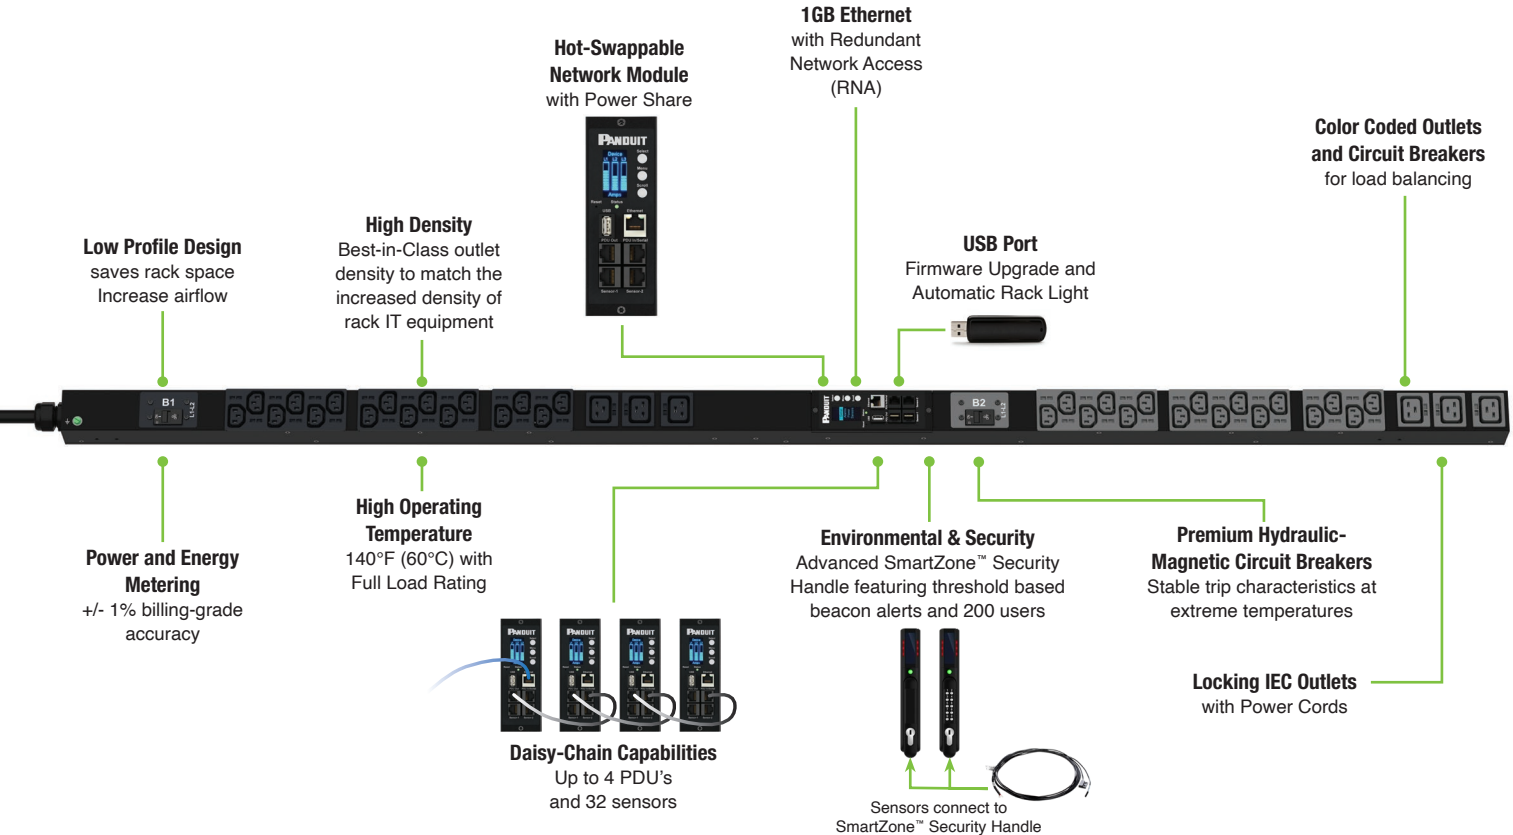

NORTH AMERICA  
Basic PDU

	Input Current per phase	Form Factor	Input Plug Type	Apparent Power (kVA)	Outlet Count	Outlet Type	Length (inches)	Width (inches)	Depth (inches) at Outlet position	Panduit Part No.
100-240VAC, 1-Phase	15	1U	NEMA 5-15P	1.4	12	Ⓢ (12)5-20R	1.6	17.5	2.0	P12B01M
	20	1U	NEMA 5-20P	1.9	12	Ⓢ (12)5-20R	1.6	17.5	2.0	P12B19M
	20	1U	NEMA L5-20P	1.9	12	Ⓢ (12)5-20R	1.6	17.5	2.0	P12B30M
	20	1U	NEMA L6-20P	3.3	12	Ⓢ (12)C13	1.6	17.5	2.0	P12B46M
	30	1U	NEMA L6-30P	5.0	12	Ⓢ (12)C13	1.7	17.5	7.8	P12B47M
	50	1U	CS8265C	8.3	6	Ⓢ (6)C19	1.7	17.5	7.8	P06B48M
	30	2U	NEMA L5-30P	2.9	16	Ⓢ (16)5-20R	3.4	17.5	7.8	P16B41M
	15	0U HALF	NEMA 5-15P	1.4	16	Ⓢ (16)5-20R	32.2	2.0	2.1	P16B04M
	20	0U HALF	NEMA 5-20P	1.9	16	Ⓢ (16)5-20R	32.2	2.0	2.1	P16B07M
	20	0U HALF	NEMA L5-20P	1.9	16	Ⓢ (16)5-20R	32.2	2.0	2.1	P16B08M
	20	0U HALF	NEMA L5-20P	1.9	22	Ⓢ (20)C13, ☒ (2)C19	32.2	2.0	2.1	P22B05M
	20	0U HALF	NEMA L6-20P	3.3	22	Ⓢ (20)C13, ☒ (2)C19	32.2	2.0	2.1	P22B10M
	30	0U HALF	NEMA L5-30P	2.9	22	Ⓢ (22)5-20R	32.2	2.0	2.1	P22B09M
	30	0U HALF	NEMA L6-30P	5.0	20	Ⓢ (20)C13	32.2	2.0	2.1	P20B16M
	30	0U MID	NEMA L6-30P	5.0	24	Ⓢ (20)C13, ☒ (4)C19	58.7	2.0	2.1	P24B15M
	30	0U MID	NEMA L6-30P	5.0	42	Ⓢ (36)C13, ☒ (6)C19	58.7	2.0	2.1	P42B17M
50	0U MID	CS8265C	8.3	36	Ⓢ (30)C13, ☒ (6)C19	58.7	2.0	2.1	P36B18M	
50	0U MID	50A Hardwire	8.3	36	Ⓢ (30)C13, ☒ (6)C19	58.7	2.0	2.1	P36B20M	
208VAC, 3-Phase	30	1U	NEMA L15-30P	8.6	6	Ⓢ (6)C19	1.7	17.5	7.8	P06B49M
	30	1U	NEMA L21-30P	8.6	6	Ⓢ (6)C19	1.7	17.5	7.8	P06B50M
	50	1U	CS8365C	14.4	6	Ⓢ (6)C19	1.7	17.5	7.8	P06B02M
	30	1U	IEC 60309 3P+E 9h 60A (IP44)	17.3	6	Ⓢ (6)C19	1.7	17.5	7.8	P06B03M
	50	0U HALF	NEMA L15-30P	8.6	18	Ⓢ (18)C13	32.2	2.0	2.1	P18B21M
	60	0U HALF	NEMA L21-30P	8.6	18	Ⓢ (18)C13	32.2	2.0	2.1	P18B24M
	30	0U MID	NEMA L15-30P	8.6	36	Ⓢ (30)C13, ☒ (6)C19	58.7	2.0	2.1	P36B22M
	30	0U MID	NEMA L21-30P	8.6	30	Ⓢ (24)C13, ☒ (3)C19, (3)5-20R	58.7	2.0	2.1	P30B25M
	30	0U MID	NEMA L21-30P	8.6	36	Ⓢ (30)C13, ☒ (6)C19	58.7	2.0	2.1	P36B26M
	30	0U FULL	NEMA L15-30P	8.6	42	Ⓢ (36)C13, ☒ (6)C19	68.9	2.0	2.1	P42B23M
	30	0U FULL	NEMA L21-30P	8.6	42	Ⓢ (36)C13, ☒ (6)C19	68.9	2.0	2.1	P42B27M
	50	0U FULL	CS8365C	10.0	42	Ⓢ (36)C13, ☒ (6)C19	68.9	2.0	2.1	P42B28M
	60	0U FULL	IEC 60309 3P+E 9h 60A (IP44)	17.3	24	Ⓢ (12)C13, ☒ (12)C19	68.9	2.0	2.1	P24B14M