
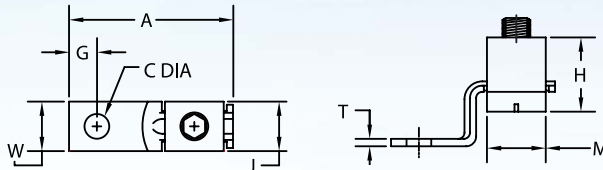


Copper Mechanical Lugs - One Hole, Single Collar

Types SLU and SAU (Offset Tongue)

- Manufactured from electrolytic copper for maximum conductivity and strength
- Unique design of the concave pressure bar and V-bottom collar assures positive contact and firm, permanent grip
- Offset tongue for joining a wide range of cable to equipment pads or bars
- Plated steel set screws resist corrosion
- For tin plating, suffix catalog number with "-TN"



CATALOG NUMBER	COPPER CONDUCTOR RANGE	FIGURE DIMENSIONS (IN.)								SET SCREW TYPE
		A	W	G	C (DIA.)	T	M	H	J	
SLU-25*	10 Str. - 14 Str.	.91	.31	.19	.16	.07	.28	.36	.25	Pan Head Slotted
+SLU-35	6 Str. - 14 Sol.	1.17	.38	.21	.20	.06	.43	.49	.35	Pan Head Slotted
+SAU-70	4 Str. - 14 Sol.	1.39	.50	.26	.27	.08	.43	.55	.39	Headless Slotted
+SLU-70	2 Str. - 8 Sol.	1.55	.50	.26	.27	.08	.49	.64	.47	Headless Slotted
SLU-125	1/0 Str. - 8 Sol.	1.95	.63	.33	.27	.12	.60	.82	.63	Socket Hex
SLU-175	3/0 Str. - 4 Str.	2.21	.75	.43	.41	.12	.73	1.04	.71	Socket Hex
SLU-225	4/0 Str. - 6 Str.	2.62	.98	.48	.35	.12	.98	1.16	.77	Socket Hex
SLU-300	350 kcmil - 1/0 Str.	3.31	.98	.52	.41	.19	1.20	1.41	1.02	Socket Hex
SLU-400	500 kcmil - 4/0 Str.	4.25	1.50	.94	.41	.19	1.46	1.63	1.16	Socket Hex
SLU-650	1000 - 600 kcmil	4.87	1.99	1.16	.53	.25	1.89	2.30	1.69	Socket Hex

*UL listed and CSA certified for power

+ UL 467 Listed and UL 486 A-B Listed

Copper Mechanical Lugs - One Hole, Single Collar

Types SLS and SAS (Straight Tongue)

- Manufactured from electrolytic copper for maximum conductivity and strength
- Compact design joins a wide range of copper conductors to equipment or terminal blocks for power and grounding applications
- Plated steel set screws resist corrosion
- For tin plating, suffix catalog number with "-TN"
- UL 467 listed and UL 486A-B listed

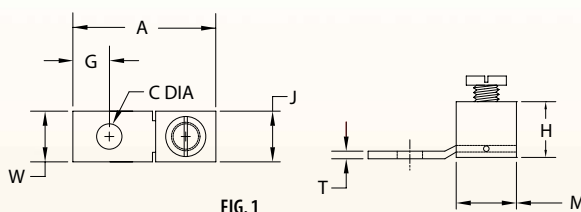


FIG. 1

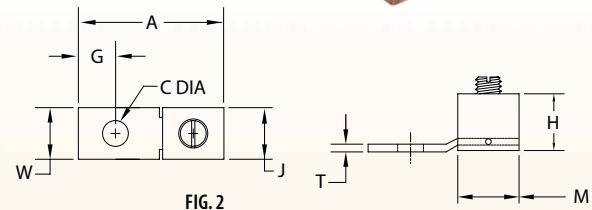


FIG. 2

CATALOG NUMBER	FIGURE NO.	COPPER CONDUCTOR RANGE	FIGURE DIMENSIONS (IN.)								SET SCREW TYPE
			A	W	G	C (DIA.)	T	M	H	J	
SLS-35	1	6 Str. - 14 Str.	1.00	.37	.24	.20	.06	.37	.47	.34	Pan Head Slotted
SLS-35x	2	6 Str. - 18 Sol.	1.00	.37	.22	.20	.07	.37	.47	.34	Headless Slotted
SAS-70	2	4 Str. - 14 Str.	1.26	.50	.38	.27	.08	.49	.53	.44	Headless Slotted