

Aluminum Dual Rated Lugs - One Hole Tongue

Type L2A

For use with two copper or aluminum conductors

- Manufactured from high strength aluminum alloy extrusion
- Electro-tin plated to ensure minimum contact resistance and corrosion protection
- Connectors are rated for 600 V, 90° C applications
- The use of oxide inhibitor is recommended for all aluminum terminations

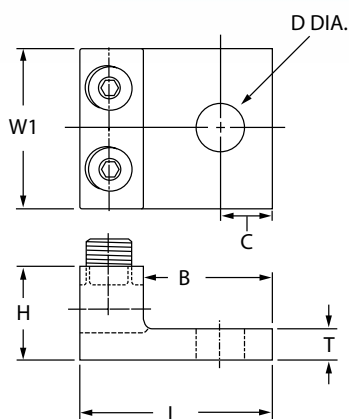


FIG. 1

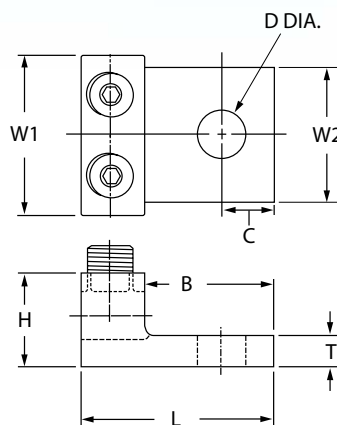


FIG. 2

CATALOG NUMBER	FIG. NO.	CONDUCTOR RANGE	FIGURE DIMENSIONS (IN.)								MTG. BOLT SIZE	HEX SIZE
			L	W ¹	W ²	H	T	B	C	D (DIA.)		
L2A-0	1	14 Str. - 1/0 Str.	1.46	1.22	—	.79	.19	.84	.44	.27	1/4	SLOT
L2A-2/0	1	14 Str. - 2/0 Str.	1.46	1.25	—	.79	.19	.84	.42	.27	1/4	3/16
L2A-250	1	6 Str. - 250 kcmil	2.56	1.66	—	1.19	.25	1.56	.87	.39	3/8	5/16
L2A-250-W2	2	6 Str. - 250 kcmil	2.56	1.66	1.40	1.19	.25	1.56	.87	.39	3/8	5/16
L2A-350	1	6 Str. - 350 kcmil	2.87	1.91	—	1.22	.25	1.74	.87	.56	1/2	5/16
L2A-350-W2	2	6 Str. - 350 kcmil	2.87	1.91	1.75	1.22	.25	1.74	.87	.56	1/2	5/16
L2A-600	1	2 Str. - 600 kcmil	3.19	2.41	—	1.57	.44	1.81	.63	.53	1/2	1/2
L2A-600-W2	2	2 Str. - 600 kcmil	3.19	2.41	2.00	1.57	.44	1.81	.63	.53	1/2	1/2
L2A-800	1	350 - 800 kcmil	3.37	3.19	—	1.94	.50	1.75	.87	.66	5/8	1/2
L2A-1000	1	500 - 1000 kcmil	3.37	3.19	—	1.94	.50	1.75	.87	.66	5/8	1/2