

Aluminum Dual Rated Lugs - Four Hole Tongue Types LA4M4 and LA4D4

For use with four copper or aluminum conductors

- Manufactured from high strength aluminum alloy extrusion
- Electro-tin plated to ensure minimum contact resistance and protection against corrosion when used with copper wire
- Four hole mounting pad allows for maximum surface contact in heavy duty applications
- Connectors are rated for 600 V, 90°C applications
- The use of oxide inhibitor is recommended for all aluminum terminations

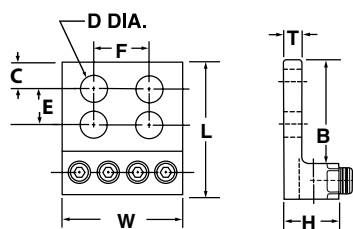


FIG. 1




FIG. 2

CATALOG NUMBER	FIG. NO.	CONDUCTOR RANGE	FIGURE DIMENSIONS (IN.)									MTG. BOLT SIZE	HEX SIZE
			L	W	H	T	B	C	D (DIA.)	E	F		
LA4M4-250	1	6 Str. - 250 kcmil	4.13	3.94	1.25	.31	3.00	.63	.51	1.75	1.75	1/2	5/16
LA4M4-350	1	6 Str. - 350 kcmil	4.13	3.74	1.25	.31	3.25	.63					5/16
*LA4D4-600	2	2 Str. - 600 kcmil	5.88	4.88	1.56	.44	3.12	.63					1/2
*LA4D4-750	2	250 - 750 kcmil	6.19	5.49	1.88	.56	3.44	.63					1/2

*Larger connector sizes utilize tandem set screws that provide superior mechanical performance