


## Double Row Terminal Blocks

### Type 3000

- Compact size of Series 3000 lends itself for use in limited space applications
- Wire range: 14-22 AWG Sol./Str.
- Molded base is manufactured from general purpose phenolic rated 150° C
- Ratings: 20 amps, 300V

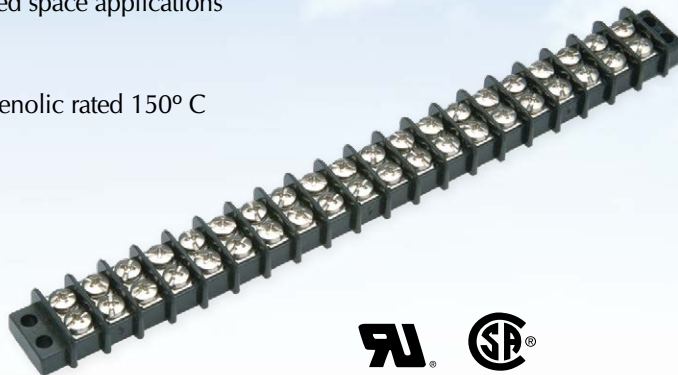

| CATALOG NUMBER | NUMBER OF WIRES PER SIDE | FIGURE DIMENSIONS (IN.) |     |       |       |     |     |
|----------------|--------------------------|-------------------------|-----|-------|-------|-----|-----|
|                |                          | W                       | H   | L     | E     | D   | C   |
| 3002           | 2                        | .87                     | .44 | 1.41  | 1.13  | .13 | .31 |
| 3003           | 3                        |                         |     | 1.78  | 1.50  |     |     |
| 3004           | 4                        |                         |     | 2.16  | 1.88  |     |     |
| 3005           | 5                        |                         |     | 2.53  | 2.25  |     |     |
| 3006           | 6                        |                         |     | 2.91  | 2.63  |     |     |
| 3007           | 7                        |                         |     | 3.28  | 3.00  |     |     |
| 3008           | 8                        |                         |     | 3.66  | 3.38  |     |     |
| 3009           | 9                        |                         |     | 4.03  | 3.75  |     |     |
| 3010           | 10                       |                         |     | 4.41  | 4.13  |     |     |
| 3011           | 11                       |                         |     | 4.78  | 4.50  |     |     |
| 3012           | 12                       |                         |     | 5.16  | 4.88  |     |     |
| 3013           | 13                       |                         |     | 5.53  | 5.25  |     |     |
| 3014           | 14                       |                         |     | 5.91  | 5.63  |     |     |
| 3015           | 15                       |                         |     | 6.28  | 6.00  |     |     |
| 3016           | 16                       |                         |     | 6.66  | 6.38  |     |     |
| 3017           | 17                       |                         |     | 7.03  | 6.75  |     |     |
| 3018           | 18                       |                         |     | 7.41  | 7.13  |     |     |
| 3019           | 19                       |                         |     | 7.78  | 7.50  |     |     |
| 3020           | 20                       |                         |     | 8.16  | 7.88  |     |     |
| 3021           | 21                       |                         |     | 8.53  | 8.25  |     |     |
| 3022           | 22                       |                         |     | 8.91  | 8.63  |     |     |
| 3023           | 23                       |                         |     | 9.28  | 9.00  |     |     |
| 3024           | 24                       |                         |     | 9.66  | 9.38  |     |     |
| 3025           | 25                       |                         |     | 10.03 | 9.75  |     |     |
| 3026           | 26                       |                         |     | 10.41 | 10.13 |     |     |
| 3027           | 27                       |                         |     | 10.78 | 10.50 |     |     |
| 3028           | 28                       |                         |     | 11.16 | 10.88 |     |     |
| 3029           | 29                       |                         |     | 11.53 | 11.25 |     |     |
| 3030           | 30                       |                         |     | 11.91 | 11.63 |     |     |

