
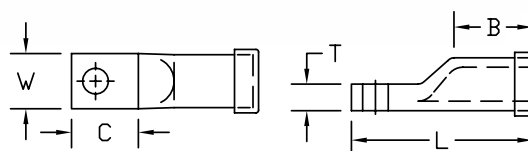


Standard Barrel - One Hole Narrow Tongue

Type BLUA-S-NT

- Manufactured from seamless aluminum tubing
- Tin plated and factory prefilled with oxide inhibitor compound
- Beveled entry for easy cable insertion
- Narrow tongue design for limited space applications
- Color coding conforms to industry standards ensuring proper die selection and providing for a faster installation
- Connectors are marked with catalog number, wire size, die index and crimp locations
- Connectors are suitable for voltages up to 35 KV
- End caps provided to prevent foreign materials from entering and contaminating the connector prior to usage
- Connectors are UL listed and CSA certified with Penn-Union, Burndy, T&B, Huskie and Greenlee tooling



CATALOG NUMBER	ALUMINUM & COPPER CONDUCTOR SIZE	STUD HOLE SIZE	FIGURE DIMENSIONS (IN.)					COLOR CODE	INSTALLATION TOOLING				
			TONGUE WIDTH "W"	TONGUE LENGTH "C"	TONGUE THICKNESS "T"	BARREL LENGTH "B"	OVERALL LENGTH "L"		PENN-UNION DIELESS MECHANICAL TOOLS	BURNDY DIE INDEX NO.	PENN-UNION DIE CATALOG NO.	WIRE STRIP LENGTH	
BLUA-8S-NT	8 AWG	1/4	.40	.62	.12	.56	1.56	Blue	TDM-250 or TDM-500		374	T-374	3/4"
BLUA-6S-NT	6 AWG	1/4	.50	.80	.13	.69	1.83	Gray			346	T-346	7/8"
BLUA-4S3-NT	4 AWG	1/4	.50	.80	.21	.87	1.89	Green			375	T-375	1"
BLUA-2S3-NT	2 AWG	1/4	.55	.86	.27	.78	2.05	Pink			348	T-348	1"
BLUA-2S4-NT		5/16	.55	.86	.27	.78	2.05						
BLUA-1S1-NT	1 AWG	1/4	.55	.78	.23	.91	1.92	Gold			471	T-471	1-1/16"
BLUA-1S3-NT		5/16	.55	.84	.23	.91	1.95						
BLUA-1/0S3-NT	1/0 AWG	5/16	.64	.86	.30	.88	2.17	Tan			296	T-296	1-1/16"
BLUA-1/0S-NT		3/8	.64	.86	.30	.88	2.17						
BLUA-2/0S5-NT	2/0 AWG	5/16	.64	.84	.36	1.09	2.31	Olive			297	T-297	1-1/4"
BLUA-2/0S1-NT		3/8	.64	1.20	.36	1.09	2.62						
BLUA-3/0S5-NT	3/0 AWG	5/16	.78	.84	.34	1.25	2.59	Ruby			467	T-467	1-3/8"
BLUA-3/0S2-NT		3/8	.78	1.06	.34	1.25	2.81						
BLUA-4/0S3-NT	4/0 AWG	5/16	.78	.84	.45	1.31	2.66	White			298	T-298	1-7/16"
BLUA-4/0S5-NT		3/8	.78	1.20	.45	1.28	2.97						
BLUA-02S52-NT	250 kcmil	3/8	.98	1.20	.42	1.41	3.11	Red			324	T-324	1-9/16"
BLUA-02S5-NT		1/2	.98	1.53	.42	1.41	3.44						
BLUA-030S3-NT	300 kcmil	5/16	.98	1.25	.51	1.06	2.44	Blue	TDM-500		470	T-470	1-5/8"
BLUA-030S2-NT		3/8	.98	1.25	.51	1.50	3.63						
BLUA-030S1-NT		1/2	.98	1.56	.51	1.50	3.88						
BLUA-03S53-NT	350 kcmil	5/16	1.00	1.25	.58	1.63	3.50	Brown			299	T-299	1-3/4"
BLUA-03S52-NT		3/8	1.00	1.25	.58	1.63	3.50						
BLUA-03S51-NT		1/2	1.00	1.55	.58	1.61	3.91						
BLUA-040S1-NT	400 kcmil	5/16	1.20	1.25	.57	1.81	4.28	Green			472	T-472	2"
BLUA-040S4-NT		3/8	1.20	1.25	.57	1.81	4.28						
BLUA-040S2-NT		1/2	1.20	1.50	.57	1.81	4.53						
BLUA-050S1-NT	500 kcmil	3/8	1.32	1.25	.54	1.88	4.06	Pink			300	T-300	2-1/16"
BLUA-050S2-NT		1/2	1.32	1.50	.54	1.88	4.31						
BLUA-060S2-NT	600 kcmil	1/2	1.31	2.03	.78	2.00	5.16	Black			473	T-473	2-1/8"
BLUA-060S-NT		5/8	1.31	1.72	.78	2.00	4.84						
BLUA-07S54-NT	750 kcmil	1/2	1.49	2.06	.63	2.25	5.25	Yellow			936	T-936	2-3/8"
BLUA-07S51-NT		5/8	1.49	2.19	.63	2.25	5.38						

- Connectors are UL listed per UL486A-B and CSA certified per C22.2 No.65 for POWER applications

◆ See page 106 for expanded conductor ranges when installed with select dieless compression tools.