

Heavy Duty Two Hole Cast Copper Lugs – Center Formed for Diesel Locomotive Cable (DLO)

Type LL-D-CF

- Heavy duty cast copper compression lugs for traction motor applications
- Cast out of pure copper alloy for high conductivity
- Center formed design maintains conductor alignment with mounting surface
- Electro-tin plated for corrosion resistance
- Suitable for installation with existing hydraulic crimping tools

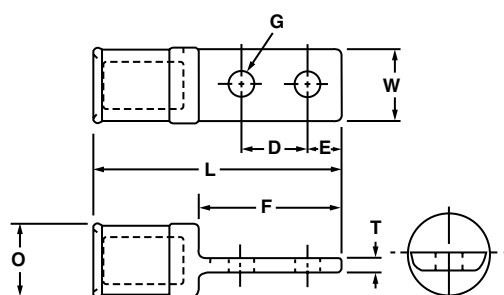


Fig. 1




Fig. 2

CATALOG NUMBER	FIG. NO.	DIESEL LOCOMOTIVE CABLE STRANDING	FIGURE DIMENSIONS (IN.)								T&B DIE INDEX NO.
			G	L	F	D	E	O	W	T	
LL-47428-D-CF	1	133/24	5/16	2.94	1.88	.88	.44	.66	.59	.20	50
LL-47271-D-CF	1	150/24	5/16	2.94	1.88	.88	.44	.66	.59	.20	50
LL-44385-D-CF	1	225/24	5/16	3.00	1.88	.88	.44	.72	.69	.20	54
LL-50545-D-CF	1	275/24	5/16	3.00	1.88	.88	.44	.72	.69	.20	54
LL-44075-D-CF	1	325/24	5/16	3.00	1.88	.88	.44	.72	.69	.20	54
LL-41155-D-CF	1	375/24	5/16	3.13	2.00	.88	.44	.78	.78	.20	60
LL-41156-D-CF	1	450/24	5/16	3.13	2.00	.88	.44	.78	.78	.20	60
LL-36996-D-CF	1	550/24	5/16	3.19	1.88	.88	.44	1.05	.94	.20	76
LL-42596-D-CF	1	650/24	5/16	3.19	1.88	.88	.44	1.05	.94	.20	76
LL-41153-D-CF	1	775/24	5/16	3.19	1.88	.88	.44	1.05	.94	.20	76
LL-44131-D-CF	1	925/24	3/8	3.75	2.06	1.00	.44	1.19	1.13	.38	87
LL-44573-D-CF	1	1100/24	3/8	3.75	2.06	1.00	.44	1.34	1.34	.38	99
LL-44096-D-CF	1	1325/24	3/8	3.75	2.06	1.00	.44	1.38	1.34	.38	107
LL-43606-D-CF	2	1325/24	3/8	3.75	2.06	.88 - 1.00	.56	1.38	1.34	.38	107
LL-50429-D-CF	1	1600/24	3/8	3.75	2.06	1.00	.44	1.38	1.34	.38	107
LL-41154-D-CF	2	1925/24	3/8	3.81	2.06	.88 - 1.00	.56	1.44	1.44	.38	112
LL-42684-D-CF	1	2300/24	3/8	4.28	2.13	1.00	.44	1.66	1.59	.38	130

For blank pad, add suffix "- U" to catalog number

Above terminals can be installed with the following T&B Tooling: 12 ton head (13642), 20 ton head (21920), and 40 ton head (21940)

T&B is a registered trademark of its respective company