


**SWITCHES**  
**BASIC PRECISION**

Featuring: **MICRO SWITCH**  
a Honeywell Division



**BZ Basic Precision Switches**

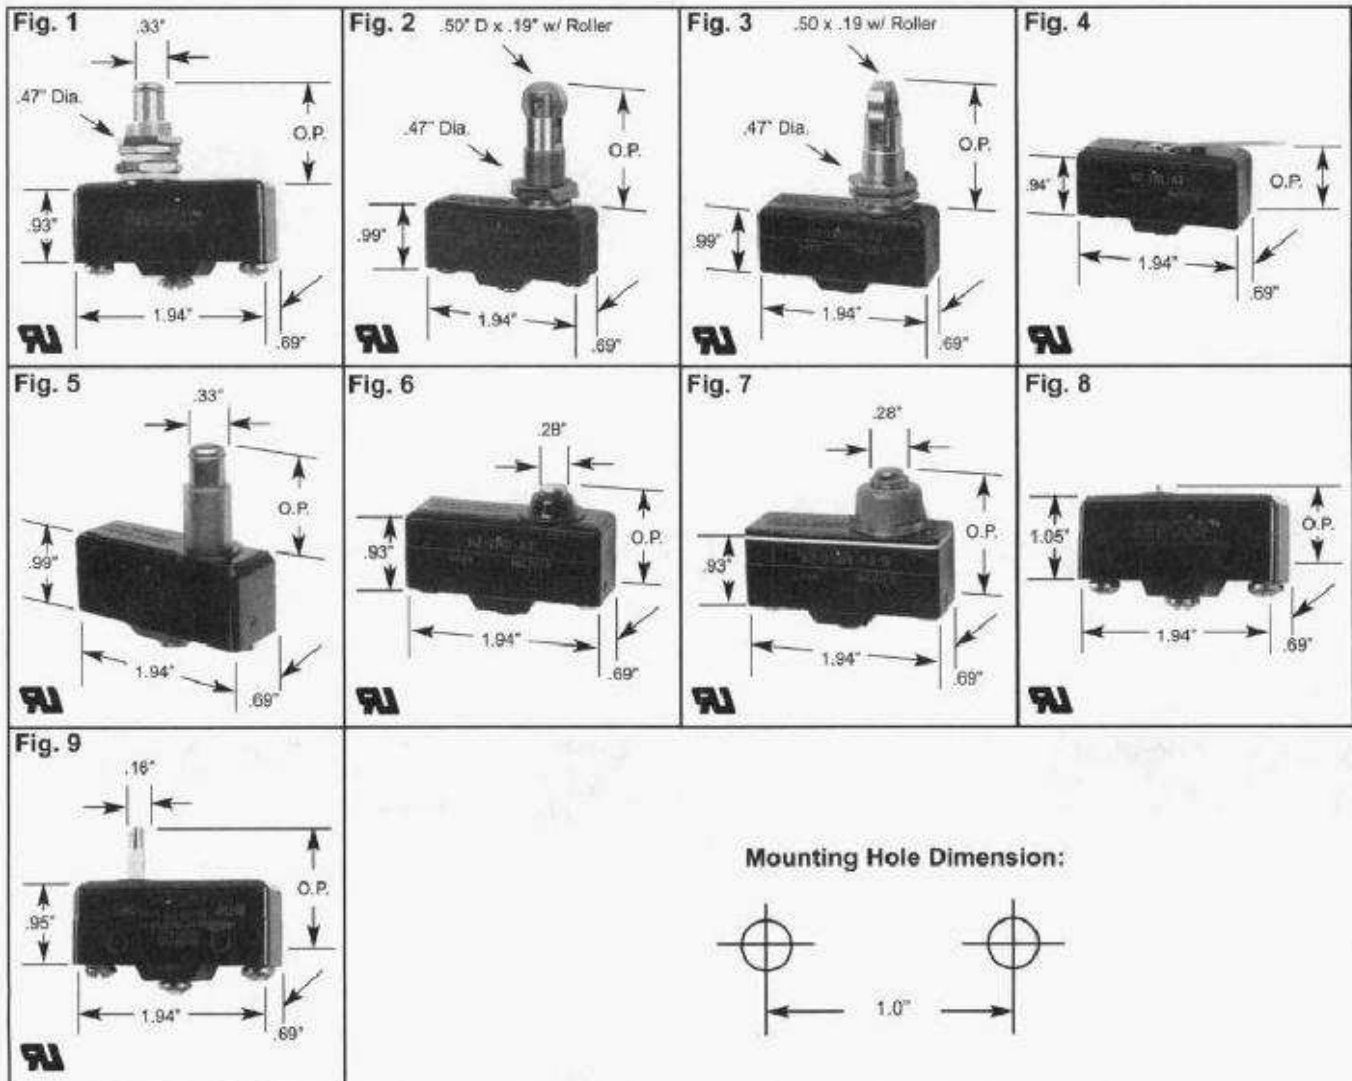

| Actuator Style  | Ratings              | O.F. (Oz) | R.F. (Oz) | P.T. Max (in) | O.T. Min. (in) | D.T. (in)     | O.P. (in)  | Part Number* | Fig. No. |
|---|----------------------|-----------|-----------|---------------|----------------|---------------|------------|--------------|----------|
| 15/32" 32NS Bushing Mount Overtravel Plunger              | 15 Amps <sup>1</sup> | 9 - 13    | 4         | .015          | .219           | .0004 - .0020 | .859±.030  | BZ-2RQ1-A2   | 1        |
| 15/32" 32NS Bushing Mount Overtravel Roller Plunger       | 15 Amps <sup>1</sup> | 9 - 13    | 4         | .015          | .140           | .0004 - .0020 | 1.312±.045 | BZ-2RQ18-A2  | 2        |
| 15/32" 32NS Bushing Mount Overtravel Cross Roller Plunger | 15 Amps <sup>1</sup> | 9 - 13    | 4         | .015          | .140           | .0004 - .0020 | 1.312±.045 | BZ-2RQ181-A2 | 3        |
| Flexible Leaf   | 15 Amps <sup>1</sup> | 5         | 0.5       | ---           | .060           | .050          | .688±.030  | BZ-2RL-A2    | 4        |
| Overtravel Plunger  | 15 Amps <sup>1</sup> | 9 - 13    | 4         | .015          | .219           | .0004 - .0020 | 1.500±.020 | BZ-2RQ-A2    | 5        |
| Large Overtravel Plunger                                  | 15 Amps <sup>1</sup> | 9 - 13    | 4         | .015          | .060           | .0004 - .0020 | .835±.020  | BZ-2RD-A2    | 6        |
| Large Sealed Overtravel Plunger                           | 15 Amps <sup>1</sup> | 13 - 19   | 4         | ---           | .062           | .0004 - .0025 | 1.110±.020 | BZ-2RDS-A2-S | 7        |
| Pin Plunger   | 15 Amps <sup>1</sup> | 9 - 13    | 4         | .015          | .005           | .0004 - .0020 | .625±.015  | BZ-2R-A2     | 8        |
| Small Overtravel Plunger                                  | 15 Amps <sup>1</sup> | 9 - 13    | 4         | .015          | .060           | .0004 - .0025 | 1.110±.020 | BZ-2RS-A2    | 9        |

**CHARACTERISTICS:**  
O.F. - Operating Force; R.F. - Release Force; P.T. - Pretravel; O.T. - Overtravel; D.T. - Differential Travel; O.P. - Operating Position.  
1 - SPDT; UL Rating: 5 Amps, 250 VAC.

\* **TERMINATION:**  
A2 - Bottom facing 6-32 NC x .218" screw with cup washers.

SELECTA SWITCH, INC. • Toll Free: 800-722-6445 • Toll Free Fax: 800-433-4319 • www.selectaswitch.com

Page 64 Products shown are top movers only. Call for additional listings