

TOGGLE SWITCHES • UTILITY & HEAVY DUTY

.50" MOUNTING HOLE DIAMETER										
POLES & THROWS	CIRCUIT FUNCTIONS	NOMINAL RATING			ACTUATOR STYLE	ACTUATOR MATERIAL	LIGHTED TOGGLE/ TOGGLE COLOR	TERMINATION TYPE	CATALOG NUMBER	FIG. NO.
		AMPS	AMPS	H.P.						
		125 VAC	250 VAC	125-250 VAC						

FIG. NO.	MAINTAINED CONTACT								
	POLES & THROWS	CIRCUIT FUNCTIONS	AMPS 125 VAC	AMPS 250 VAC	H.P. 125-250 VAC	ACTUATOR STYLE	ACTUATOR MATERIAL	LIGHTED TOGGLE/TOGGLE COLOR	TERMINATION TYPE
1	DPST	ON-OFF	20*	2^		BAT	BRASS/NICKEL	NO/NICKEL	SCREW
2	DPDT	ON-ON	15	10	3/4	FLAT	NYLON	NO/BLACK	SCREW
3	DPDT	ON-ON	15	10	3/4	FLAT	NYLON	NO/BLACK	.250" SPADE
4	DPDT	ON-ON	20	10	3/4	BAT	BRASS/NICKEL	NO/NICKEL	.250" SPADE
5	DPDT	ON-ON	20	10Δ	1 1/2	BAT	BRASS/NICKEL	NO/NICKEL	.250" SPADE
6	DPDT	ON-ON	20	20		BAT	BRASS/NICKEL	NO/NICKEL	SCREW
5	DPDT	ON-OFF-ON	15	10	3/4	BAT	BRASS/NICKEL	NO/NICKEL	.250" SPADE
2	DPDT	ON-OFF-ON	15	10	3/4	FLAT	NYLON	NO/BLACK	SCREW
3	DPDT	ON-OFF-ON	15	10	3/4	FLAT	NYLON	NO/BLACK	.250" SPADE
4	DPDT	ON-OFF-ON	20	10	3/4	BAT	BRASS/NICKEL	NO/NICKEL	.250" SPADE
6	DPDT	ON-OFF-ON	20	20		BAT	BRASS/NICKEL	NO/NICKEL	SCREW
7	3PST	ON-OFF	15	10	3/4 @ 250	BAT	BRASS/NICKEL	NO/NICKEL	SCREW
8	3PDT	ON-ON	15	10	3/4 @ 250	BAT	BRASS/NICKEL	NO/NICKEL	SCREW
8	3PDT	ON-OFF-ON	15	10	3/4 @ 250	BAT	BRASS/NICKEL	NO/NICKEL	SCREW
9	4PST	ON-OFF	15	10	3/4 @ 250	BAT	BRASS/NICKEL	NO/NICKEL	SCREW
10	4PDT	ON-ON	15	10	3/4 @ 250	BAT	BRASS/NICKEL	NO/NICKEL	SCREW
10	4PDT	ON-OFF-ON	15	10	3/4 @ 250	BAT	BRASS/NICKEL	NO/NICKEL	SCREW

*Stated Amperage and voltage also valid for D.C. Rating











^2 HP 250 VAC/DC; 1 1/2 HP 125 VAC/DC

Δ Separate Female Quick Connect Solderless Insulated Terminals, ST-16, provided with switch when ordered with suffix "BG"

Δ Rated 10 Amps 277 VAC

*Also rated 1, 2, or 3 phase

continued on page 4

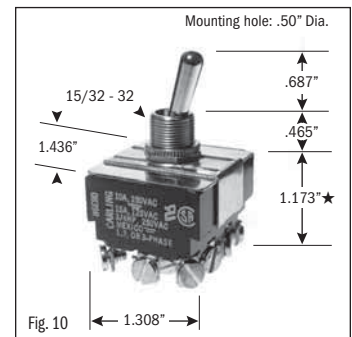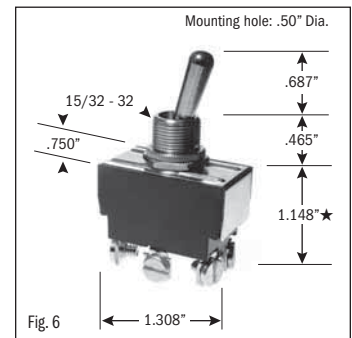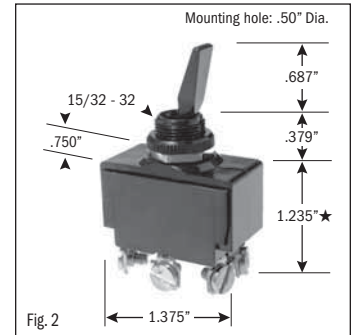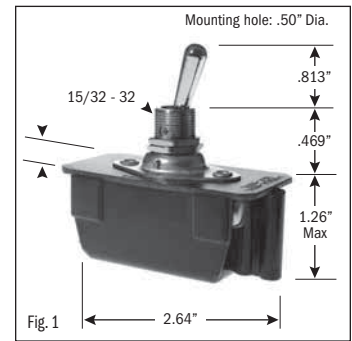

★ Switch height measurement in Figures above, includes body and terminals combined



All specifications and dimensions are for reference only. If specific information is needed and/or of critical nature, contact Selecta Products headquarters for specific information before ordering.