

Beam and Purlin Clamps

Hammer-On Flange Clips

- Hangs on box from the underside or to the front of beam flanges
- When used with combination conduit hanger, the conduit run lines up with knockouts in outlet box and eliminates offsets and bends
- 1/4–20 threaded opening
- Also available with staked stud, 1/4–20 x 3/8", to provide easier attachment of outlet boxes to beams — eliminates having to use loose screws
- Supports 100 lbs. static vertical load limit
- Installs easily with a hammer

CAT. NO.	FIG. NO.	DESCRIPTION	STATIC LOAD LIMIT (LBS.)	STD. CTN.
SSF-BH1/4	1	Clip without stud, 1/8"–1/4" flange thickness	100	100
SSF-BH1/2	1	Clip without stud, 5/16"–1/2" flange thickness	100	100
SSF-BH3/4	1	Clip without stud, 3/8"–3/4" flange thickness	100	100
SSF-BH1/4S	2	Clip with stud, 1/8"–1/4" flange thickness	100	100
SSF-BH1/2S	2	Clip with stud, 5/16"–1/2" flange thickness	100	100
SSF-BH3/4S	2	Clip with stud, 3/8"–3/4" flange thickness	100	100

- Clips fit most bulb tees and beam flanges
- 1/4" hole provided
- Installs easily with a hammer

CAT. NO.	FIG. NO.	DESCRIPTION	STATIC LOAD LIMIT (LBS.)	STD. CTN.
SSF-BF1/8	1	Hammer-on Flange Clip fits 3/32"–9/64" flange thickness	160	100
SSF-BF1/4	1	Hammer-on Flange Clip fits 1/8"–1/4" flange thickness	200	100
SSF-BF1/2	1	Hammer-on Flange Clip fits 5/16"–1/2" flange thickness	200	100
SSF-BF3/4	1	Hammer-on Flange Clip fits 3/8"–3/4" flange thickness	200	100
SSF-BFF1/8	2	Hammer-on Flange Clip fits 3/32"–9/64" flange thickness with horizontal tab	50	25
SSF-BFF1/4	2	Hammer-on Flange Clip fits 1/8"–1/4" flange thickness with horizontal tab	50	25
SSF-BFF1/2	2	Hammer-on Flange Clip fits 5/16"–1/2" flange thickness with horizontal tab	50	25
SSF-BFF3/4	2	Hammer-on Flange Clip fits 3/8"–3/4" flange thickness with horizontal tab	50	25



Fig. 1



Fig. 2

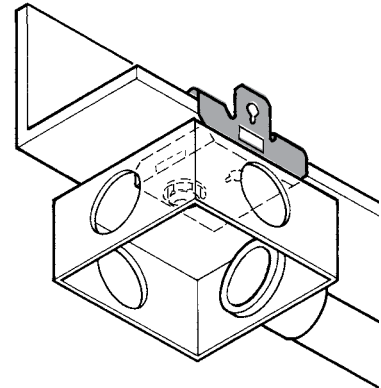


Fig. 1



Fig. 2

