


Parallel Horizontal

PG/PT

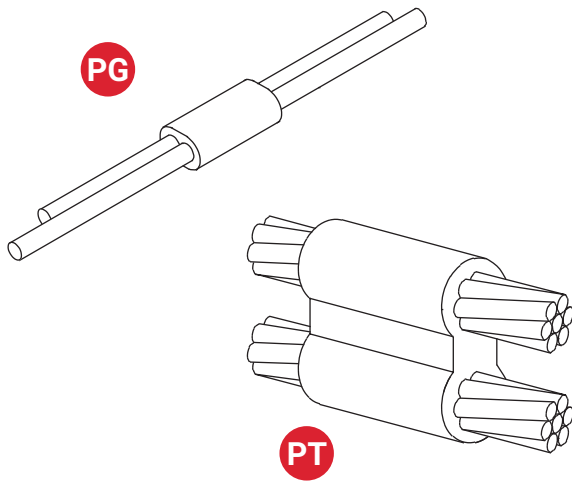

Cable Size Run	Tap	Mold Part No.	Weld Metal
6 SOL	6 SOL	PGT-1G1G	25
6	6	PGT-1H1H	25
	4	PTC-1L1L	32
	6	PTC-1L1H	32
4	6 SOL	PTC-1L1G	32
	8	PTC-1L1E	32
	8 SOL	PTC-1L1D	32
	2	PTC-1T1V	65
	2 SOL	PTC-1T1T	65
	4	PTC-1T1L	65
2 SOL	6	PTC-1T1H	45
	6 SOL	PTC-1T1G	45
	8	PTC-1T1E	45
	8 SOL	PTC-1T1D	45
	2	PTC-1V1V	65
	4	PTC-1V1L	65
	6	PTC-1V1H	45
2	6 SOL	PTC-1V1G	45
	8	PTC-1V1E	45
	8 SOL	PTC-1V1D	45
	1	PTC-1X1Y	65
	2	PTC-1X1V	65
	2 SOL	PTC-1X1T	65
1 SOL	4	PTC-1X1L	65
	6	PTC-1X1H	65
	6 SOL	PTC-1X1G	65
	8	PTC-1X1E	45
	8 SOL	PTC-1X1D	45

PARALLEL HORIZONTAL CONDUCTORS

- Parallel through connection of horizontal cables.
- Run conductor is on the bottom of Type PT molds.
- Concentric stranded copper cable unless otherwise noted.
- Solid conductor may be either copper or Copperweld®.
- **Bold letter** in mold part number is the price key.

REQUIRED TOOLS

- Handle Clamps** **L160** for **C** Price Key Molds
Clamps are included with **T** Price Key Molds
- Flint Ignitor** **T320** (Included with Handle Clamp or frame but also available separately)

SUGGESTED TOOLS

- Cable Cleaning Brush T313 or T314
Slag Removal Spade B136A or B136B
Mold Cleaning Brush T394
Cable Clamp B265
Torch Head T111

ACCESSORIES

See Section A

Cable Size Run	Tap	Mold Part No.	Weld Metal
	1	PTC-1Y1Y	65
	1 SOL	PTC-1Y1X	65
	2	PTC-1Y1V	65
	2 SOL	PTC-1Y1T	65
1	4	PTC-1Y1L	65
	6	PTC-1Y1H	65
	6 SOL	PTC-1Y1G	65
	8	PTC-1Y1E	45
	8 SOL	PTC-1Y1D	45
	1/0	PTC-2B2C	90
	1/0 SOL	PTC-2B2B	90
	1	PTC-2B1Y	65
	1 SOL	PTC-2B1X	65
	2	PTC-2B1V	65
1/0 SOL	2 SOL	PTC-2B1T	65
	4	PTC-2B1L	65
	6	PTC-2B1H	65
	6 SOL	PTC-2B1G	65
	8	PTC-2B1E	65
	8 SOL	PTC-2B1D	65