


Bronze Vi-Tite Terminal Lugs - One Hole, Square Tongue Type VL

For use with one copper conductor

- Manufactured from high strength copper alloy for maximum conductivity and corrosion resistance
- Heavy duty terminals used for joining a wide range of copper conductors to equipment pads or bus bars
- Bronze screw and pressure bar provide uniform clamping pressure on conductor
- Annular serrations in conductor grooves provide improved mechanical performance
- Inspection hole allows for visual confirmation of proper cable insertion
- Hex head screws can be furnished on request by adding suffix “-HH” to catalog number*
- For tin plating, suffix catalog number with “-TN”

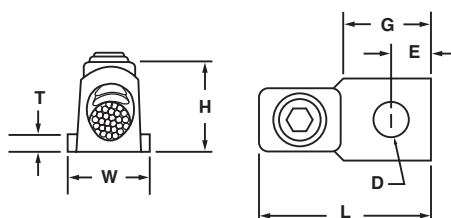

CATALOG NUMBER	CONDUCTOR RANGE	APPROXIMATE DIMENSIONS (IN.)							MTG. BOLT SIZE	HEX SIZE
		T	W	D (DIA.)	E	G	H	L		
VL-21683	4 Sol. - 1 Str.	.22	.63	.28	.38	.88	.88	1.69	1/4	3/16
VL-21685	2 Str. - 2/0 Str.	.25	.81	.41	.44	1.00	1.03	1.88	3/8	1/4
VL-21687	1/0 Str. - 4/0 Str.	.25	1.00	.41	.50	1.25	1.28	2.38	3/8	1/4
VL-21689	3/0 Str. - 300 kcmil	.31	.81	.53	.75	1.50	1.38	2.69	1/2	3/8
VL-21691	300 - 500 kcmil	.38	1.50	.69	.75	1.63	1.81	3.00	5/8	3/8
VL-21692		.38	1.38	.53	.88	1.88	1.81	3.13	1/2	3/8
VL-21694	500 - 800 kcmil	.41	1.75	.53	1.00	2.19	1.88	3.69	1/2	3/8
VL-21697	700 - 1000 kcmil	.44	2.00	.69	1.00	2.19	2.06	4.00	5/8	3/8
VL-21698		.44	2.00	.69	1.19	2.50	2.06	4.00	5/8	3/8
VL-21986	1000 - 1500 kcmil	.50	2.13	.81	1.06	2.13	2.31	4.75	3/4	1/2
VL-21987	1500 - 2000 kcmil	.56	2.50	.81	1.19	2.38	2.69	5.13	3/4	1/2

*Note: Catalog numbers with “-HH” suffix are not UL listed