

Carlton® non-metallic push-in fittings

Superior pull-out performance and cost efficiency

NEW




Features and benefits:

- Easy push-in installation in knockouts – no tools required
- Certified for one or two cables
- Insertion from inside or outside of enclosures increases installation flexibility
- Snug fit eliminates movement within knockout
- Exceeds pull-out requirements for better cable security
- Distinctive colors to differentiate sizes:
1/2" gray, 3/4" blue
- UL® Listed, CSA Certified

01 Align the flat surface or opening with the burr of the knockout for easier insertion.

02 Insert the fitting into the knockout without the cables, from the inside or the outside of the enclosure.

03 For two-cable installation: both cables may be inserted at once or one after the other.

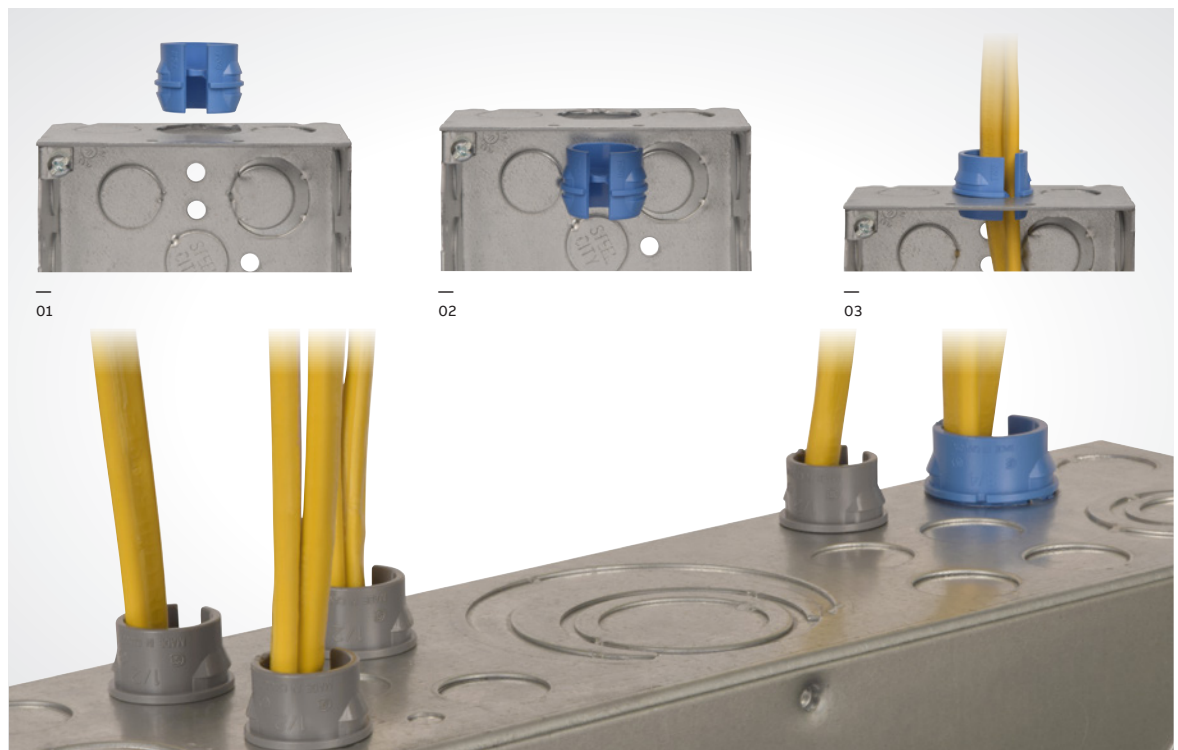

Carlton non-metallic push-in fittings



Cat. No.	Description	Trade size (in.)	Clamping range		Suggested application (non metallic sheathed cable)	Packaging	
			Min. (in.)	Max. (in.)		Inner	Outer
SNM12-6R	Non-metallic fitting 1/2 in.	1/2	0.21	0.42	14/2 - 12/2 - 10/2 - 14/3 - 12/3 - 10/3 2 cables: 2 x 14/2 - 2 x 12/2 - 1 x 14/2 - 1 x 12/2	50	300
SNM12-100CP	Non-metallic fitting 1/2 in.	1/2	0.21	0.42	14/2 - 12/2 - 10/2 - 14/3 - 12/3 - 10/3 2 cables: 2 x 14/2 - 2 x 12/2 - 1 x 14/2 - 1 x 12/2	100	1000
SNM34-6R	Non-metallic fitting 3/4 in.	3/4	0.22	0.65	12/2 - 10/2 - 8/2 - 6/2 - 14/3 - 12/3 - 10/3 - 8/3 - 6/3 2 cables: 2 x 12/2 - 2 x 10/2 - 1 x 12/2 - 1 x 10/2	40	240
SNM34-100CP	Non-metallic fitting 3/4 in.	3/4	0.22	0.65	12/2 - 10/2 - 8/2 - 6/2 - 14/3 - 12/3 - 10/3 - 8/3 - 6/3 2 cables: 2 x 12/2 - 2 x 10/2 - 1 x 12/2 - 1 x 10/2	100	1000