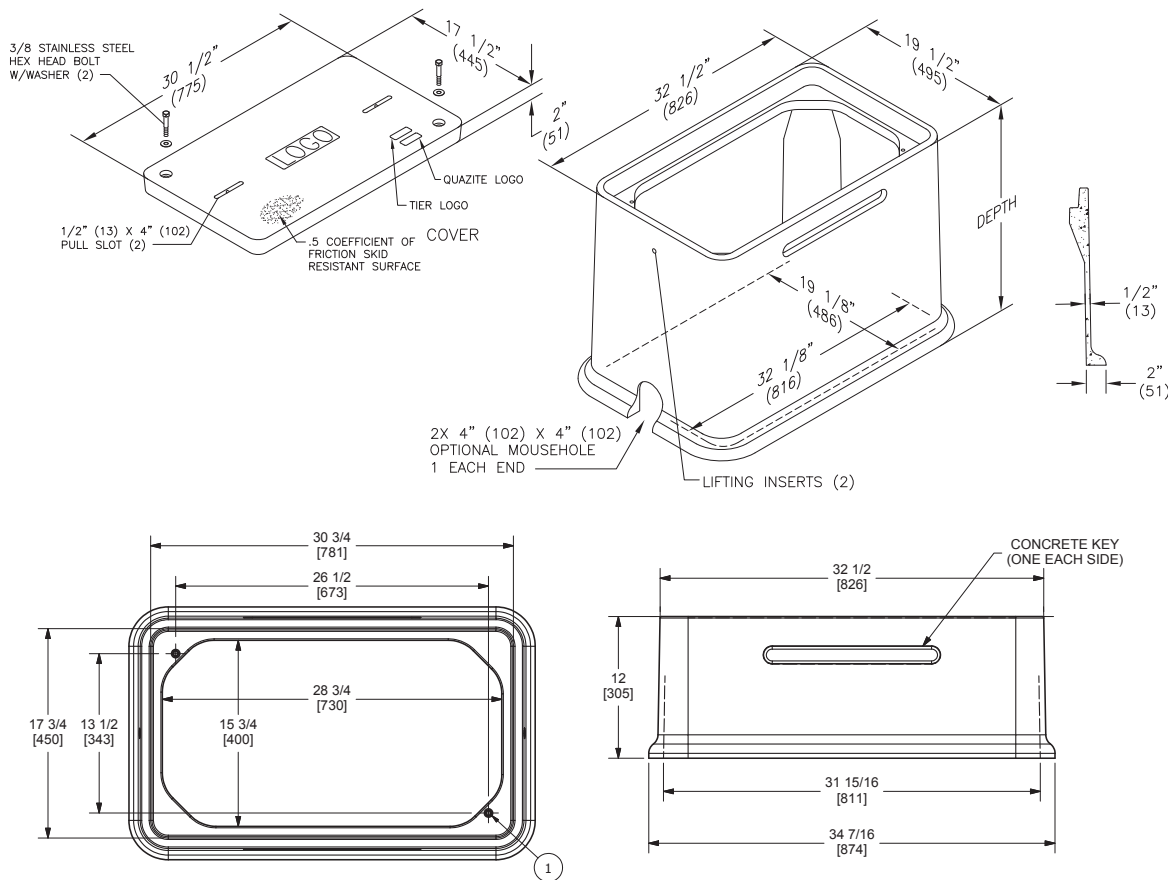# 17" x 30" PD Style Polymer Concrete Assembly

Hex Head Bolts are Standard

Covers

	DESCRIPTION	TIER	DESIGN / TEST LOAD #	WEIGHT #	PALLET QTY	PART NO.
UL	W/ 2 Bolts	8	8,000 / 12,000	52	20	PG1730CA00**
UL	W/ 2 Bolts	15	15,000 / 22,500	83	20	PG1730HA00**
UL	W/ 2 Bolts	22	22,500 / 33,750	83	20	PG1730HH00**
UL	No Bolts	8	8,000 / 12,000	52	20	PG1730WA00**

To order gasketed covers, replace the letter "A" with the letter "G".
Replace ** with a logo code found on page 66. See page 72 for meter and touch/radio read cover options.
NOTE: Gasketed covers and bolt grommets must be used with a gasketed box. Gaskets reduce the inflow of fluids but do not make the enclosure water tight.

Boxes

	DESCRIPTION	DEPTH	TIER	DESIGN / TEST LOAD #	WEIGHT #	PALLET QTY	PART NO.
UL	Standard Open Bottom	12"	22	22,500 / 33,750	84	4	PD1730BA12
UL	Standard Open Bottom	18"	22	22,500 / 33,750	129	4	PD1730BA18
	Open Bottom	26"	22	22,500 / 33,750	166	4	PD1730BA26

To order boxes with two standard mouseholes, replace the letter "A" with the letter "B".
To order gasketed boxes, replace the letter "A" with the letter "G".
NOTE: Gasketed covers and bolt grommets must be used with a gasketed box. Gaskets reduce the inflow of fluids but do not make the enclosure water tight.
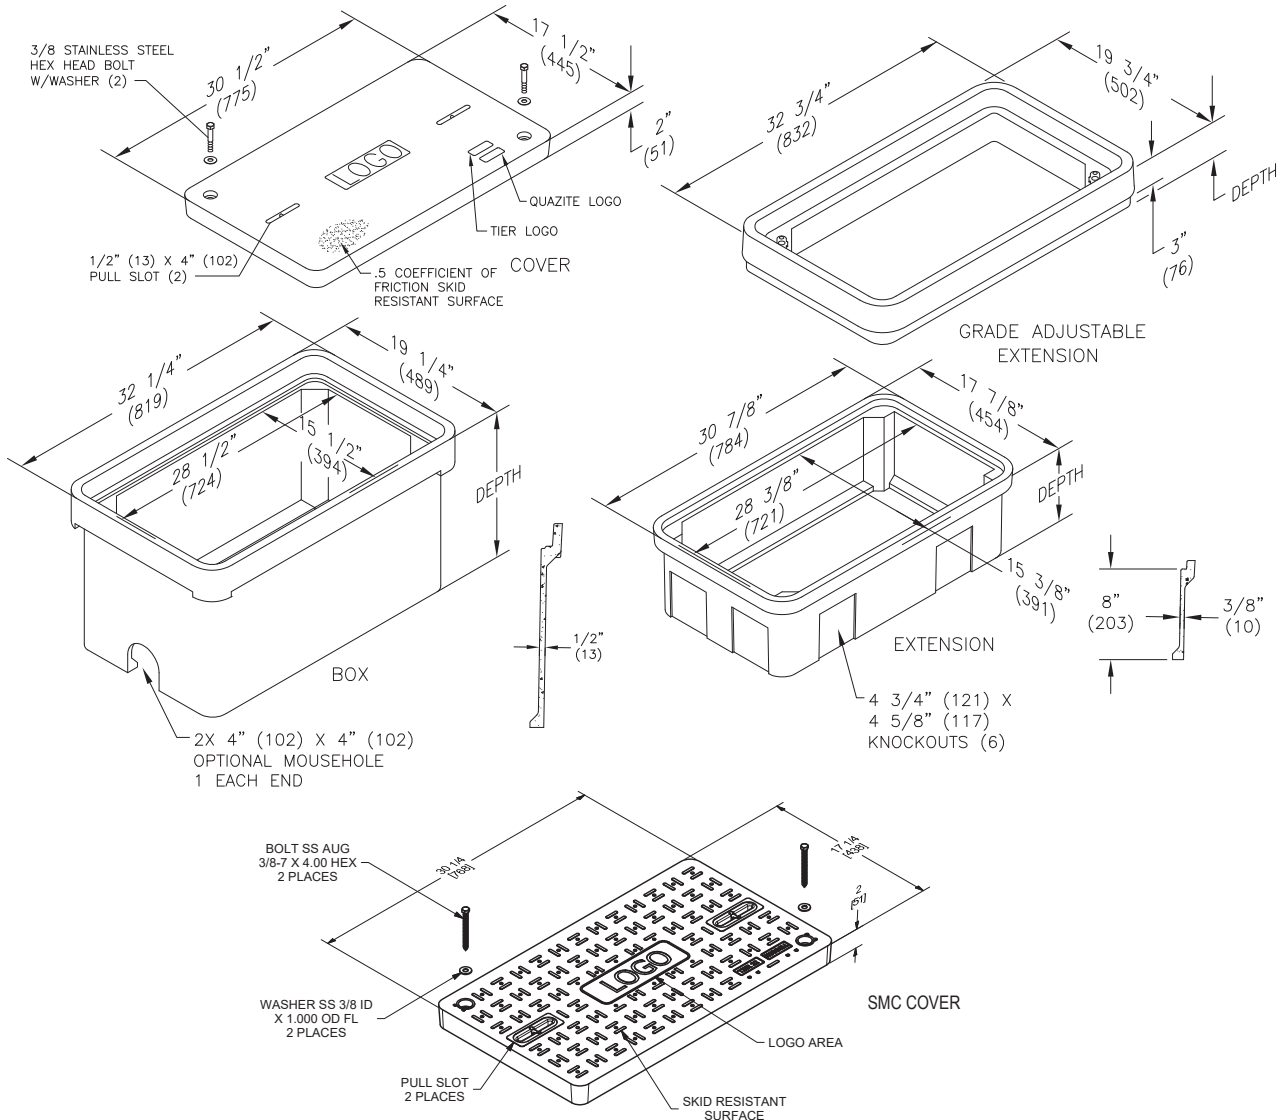
HUBBELL®

17" x 30" PG Style Polymer Concrete (Stackable) Assembly — Dimensions / Data

3/8 STAINLESS STEEL
HEX HEAD BOLT
W/WASHER (2)

30 1/2"
(775)

17 1/2"
(445)

2"
(51)

QUAZITE LOGO

TIER LOGO

1/2" (13) X 4" (102)
PULL SLOT (2)

.5 COEFFICIENT OF
FRICTION SKID
RESISTANT SURFACE

COVER

19 3/4"
(502)

DEPTH

3"
(76)

GRADE ADJUSTABLE
EXTENSION

32 1/4"
(819)

19 1/4"
(489)

15 1/2"
(394)

28 1/2"
(724)

DEPTH

BOX

1/2"
(13)

2X 4" (102) X 4" (102)
OPTIONAL MOUSEHOLE
1 EACH END

32 3/4"
(832)

30 7/8"
(784)

17 7/8"
(454)

28 3/8"
(721)

DEPTH

15 3/8"
(391)

EXTENSION

8"
(203)

3/8"
(10)

4 3/4" (121) X
4 5/8" (117)
KNOCKOUTS (6)

BOLT SS AUG
3/8-7 X 4.00 HEX
2 PLACES

30 1/4
(768)

17 1/4
(438)

2
(51)

WASHER SS 3/8 ID
X 1.000 OD FL
2 PLACES

LOGO AREA

SMC COVER

PULL SLOT
2 PLACES

SKID RESISTANT
SURFACE

Covers

	DESCRIPTION	TIER	DESIGN / TEST LOAD #	WEIGHT #	PALLET QTY	PART NO.
UL	W/ 2 Bolts	8	8,000 / 12,000	52	20	PG1730CA00**
UL	W/ 2 Bolts	15	15,000 / 22,500	83	20	PG1730HA00**
UL	W/ 2 Bolts	22	22,500 / 33,750	83	20	PG1730HH00**
UL	No Bolts	8	8,000 / 12,000	52	20	PG1730WA00**

To order gasketed covers, replace the letter "A" with the letter "G".
Replace ** with a logo code found on page 66. See page 72 for meter and touch/radio read cover options.
NOTE: Gasketed covers and bolt grommets must be used with a gasketed box. Gaskets reduce the inflow of fluids but do not make the enclosure water tight.
Available with EZ Locate. See page 71 for more information.

Quazite®

Most commonly used cover logos are shown below. Custom Logos are available. Contact your Quazite/Hubbell Representative.

Quazite® Cover Options

QUAZITE

POLYMER CONCRETE LOGO CODES	DESCRIPTION
09	BLANK
10	CATV
12	COMMUNICATIONS
14	CONTROLS
17	ELECTRIC
21	FIBER OPTICS
22	FIRE ALARM
23	GAS
24	GROUND
26	HIGH VOLTAGE
29	LIGHTING
36	SECURITY
38	SIGNAL
40	STATE TRAFFIC SIGNAL
41	STREET LIGHTING
42	TELECOM
43	TELEPHONE
44	TRAFFIC
45	TRAFFIC CONTROL
46	TRAFFIC SIGNAL
48	TV
50	WATER
57	EMERGENCY
65	ILLUMINATION
81	DANGER HIGH VOLTAGE
84	POWER
92	TELECOMMUNICATIONS
3A	DOT
6B	INSTRUMENTATION
ZA	IRRIGATION
K91	RECLAIMED WATER
KH1	FIBEROPTIC

HUBBELL