


# COMMERCIAL GRADE RECEPTACLES

**Construction Specification Grade Receptacles** 15 & 20A, 125V

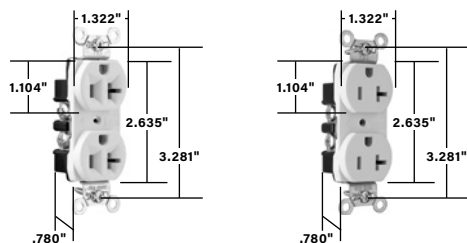

**CRB5362I**


**CRB5362SW**

## Features

- Corrosion-resistant, plated steel strap locked in to face and back body to resist pulling away from face/body assembly.
- .032 inch thick, brass, triple-wipe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and thermoplastic back body.
- 8 hole internal screw-pressure-plate back wire terminals accept #10 – 14 AWG solid or stranded copper or copper-clad conductors.
- Terminal compartments isolated from each other for positive conductor containment.
- Tri-drive terminal and mounting screws.
- Auto-ground clip assures positive ground.

| CATALOG NUMBER                      | RATING |     | COLOR        | NEMA CONFIG. NO. | 3rd PARTY COMPLIANCE                                                                    |            |
|-------------------------------------|--------|-----|--------------|------------------|-----------------------------------------------------------------------------------------|------------|
|                                     | A.     | V.  |              |                  |  UL498 | FSUL WC596 |
| DUPLEX RECEPTACLES BACK & SIDE WIRE |        |     |              |                  |                                                                                         |            |
| CRB5262I                            | 15     | 125 | Ivory        | 5-15R            | •                                                                                       | •          |
| CRB5262W                            | 15     | 125 | White        | 5-15R            | •                                                                                       | •          |
| CRB5262                             | 15     | 125 | Brown        | 5-15R            | •                                                                                       | •          |
| CRB5262GRY                          | 15     | 125 | Gray         | 5-15R            | •                                                                                       | •          |
| CRB5262BK                           | 15     | 125 | Black        | 5-15R            | •                                                                                       | •          |
| CRB5262RED                          | 15     | 125 | Red          | 5-15R            | •                                                                                       | •          |
| CRB5262LA                           | 15     | 125 | Light Almond | 5-15R            | •                                                                                       | •          |
| CRB5362I                            | 20     | 125 | Ivory        | 5-20R            | •                                                                                       | •          |
| CRB5362W                            | 20     | 125 | White        | 5-20R            | •                                                                                       | •          |
| CRB5362                             | 20     | 125 | Brown        | 5-20R            | •                                                                                       | •          |
| CRB5362GRY                          | 20     | 125 | Gray         | 5-20R            | •                                                                                       | •          |
| CRB5362BK                           | 20     | 125 | Black        | 5-20R            | •                                                                                       | •          |
| CRB5362RED                          | 20     | 125 | Red          | 5-20R            | •                                                                                       | •          |
| CRB5362LA                           | 20     | 125 | Light Almond | 5-20R            | •                                                                                       | •          |

**2 Pole, 3 Wire**



**NEMA 5-15R**

**NEMA 5-20R**

For Bulk Packaging Solutions consult factory.