



Bronze Stud Connectors

Type SLB

For stud to single or multiple bus bar vertical takeoffs

- Manufactured from high strength copper alloy
- Furnished with silicon bronze bolts, nuts, and lockwashers for corrosion resistance
- Captive bolt design permits single wrench installation
- Double bolt clamping provides additional secureness on threaded stud
- Drilling in pads conforms to NEMA standards for 1/2" hardware
- For tin plating, suffix catalog number with "-TN"

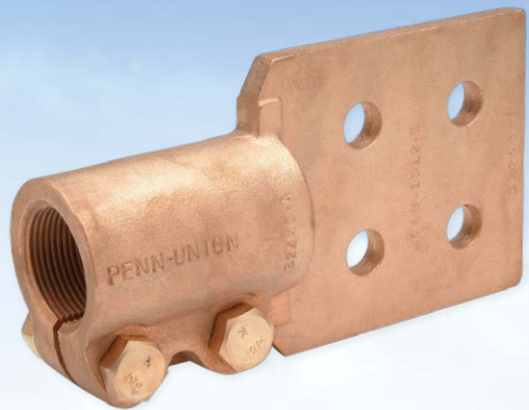

TYPE SLB




FIG. 1
(SUFFIX-D)




FIG. 2
(SUFFIX-F)





FIG. 3
(SUFFIX-E)



MULTI-TONGUE
(ILLUSTRATION 3 BAR)

CATALOG NUMBER	FIG. NO.	STUD THREAD SIZE	NO. OF BARS	FIGURE DIMENSIONS (IN.)			BOLT SIZE
				L	M	T	
SLB-0513-D	1	1/2-13	1	5.25	1.75	.25	3/8
SLB-0513-F	2		1	5.25	1.75	.25	
SLB-0611-D	1	5/8-11	1	5.25	1.75	.25	3/8
SLB-0611-F	2		1	5.25	1.75	.25	
SLB-0716-D	1	3/4-16	1	5.25	1.75	.25	3/8
SLB-0716-F	2		1	5.25	1.75	.25	
SLB-1014-D	1	1-14	1	6.00	2.25	.38	1/2
SLB-1014-F	2		1	6.00	2.25	.38	
SLB-1014-E	3		1	7.00	2.25	.38	
SLB-1014-2D	1		2	5.88	2.25	.25	
SLB-1014-2F	2		2	5.88	2.25	.25	
SLB-1014-2E	3		2	6.88	2.25	.25	
SLB-1112-D	1	1 1/8-12	1	6.00	2.25	.38	1/2
SLB-1112-F	2		1	6.00	2.25	.38	
SLB-1112-E	3		1	7.00	2.25	.38	
SLB-1112-2D	1		2	5.88	2.25	.25	
SLB-1112-2F	2		2	5.88	2.25	.25	
SLB-1112-2E	3		2	6.88	2.25	.25	

NOTE: Custom thread sizes available upon request.